



In-line fans designed for ventilation in bathrooms, wash-rooms, garages, stores, etc. Especially designed for installation in ducts 1-2 m max. connected to the fan.

- Advanced design
- Low sound level
- Suite ventilation ducts Ø100mm (DECOR-100), Ø125mm (DECOR-200) and Ø150mm (DECOR-300)
- Can be installed both vertically and horizontally.

Base model (S, SZ)

S - standard model without extra accessories

Z - model with motor with ball bearing

Fan with timer (R, RZ)

When installed in bathrooms or shower-rooms it is best done to let the fan keep on running after it has been switched off, to ventilate the air from damp, bad smell, etc. The timer is adjustable from 2-20 min.

Fan with automatic shutter (C, CZ)

When installed in outer wall it is best done with an automatic shutter to prevent incoming cold air when the fan is switched off.

Fan with adjustable hygostat (H, HZ)


For installation where automatic start of the fan is required when the humidity level in the room is above the setting value.

Wiring diagram, see page 178.


Technical specification

Type	Speed rpm	Motor power W	Voltage V	Maximum duty m³/h	Pressure max Pa	Sound level dB (A)	Weight kg
DECOR-100	2500	13	230	95	50	40	0,44
DECOR-200	2500	20	230	185	40	46	0,80
DECOR-300	2200	35	230	280	70	47	1,44
DECOR-300 PLUS	2500	38	230	325	80	50	1,46

Performance curves

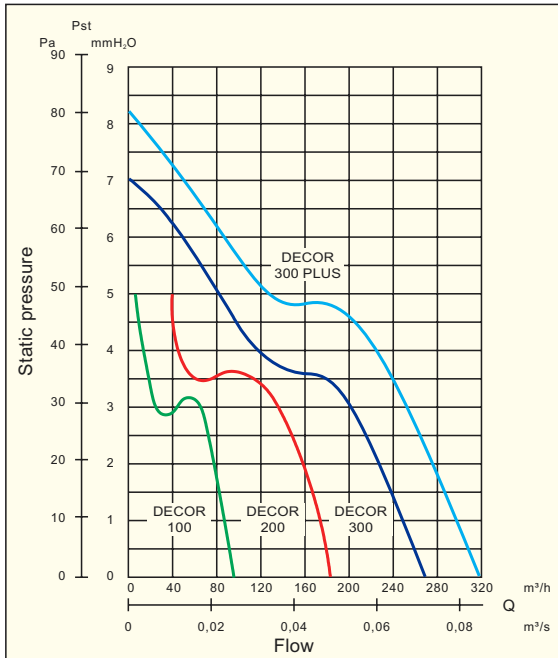

Dimensions in mm

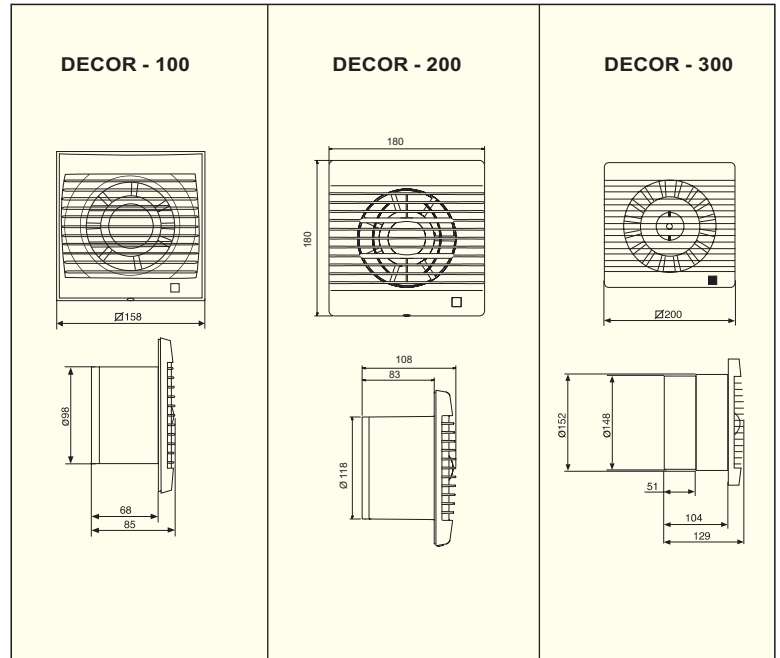

Accessories

Model	DECOR-100				DECOR-200			DECOR-300					
	C	CR	CH	CD	C	CR	CH	S	R	H	C	CR	CH
Pilot lamp	•	•	•	•	•	•	•	•	•	•	•	•	•
Adjustable timer		•	•	•		•	•		•	•		•	•
Automatic shutter	•	•	•	•	•	•	•				•	•	•
Adjustable hygostat			•				•			•			•
Movement detector				•									